



## Vantage Pro2™ Accessories

The Solar Radiation Sensor, or solar pyranometer, measures global radiation, the sum at the point of measurement of both the direct and diffuse components of solar irradiance. The sensor's transducer, which converts incident radiation to electrical current, is a silicon photodiode with wide spectral response. From the sensor's output voltage, the console calculates and displays solar irradiance. It also integrates the irradiance values and displays total incident energy over a set period of time.

The outer shell shields the sensor body from thermal radiation and provides an airflow path for convection cooling of the body, minimizing heating of the sensor interior. It includes a cutoff ring for cosine response, a level indicator, and fins to aid in aligning the sensor with the sun's rays. The space between the shield and the body also provides a run-off path for water, greatly reducing the possibility of rain- or irrigation-water entrapment. The diffuser is welded to the body for a weather-tight seal; it provides an excellent cosine response. The transducer is an hermetically-sealed silicon photodiode; the included amplifier converts the transducer current into 0 to +2.5 VDC. Spring-loaded mounting screws, in conjunction with the level indicator, enable rapid and accurate levelling of the sensor. Each sensor is calibrated against a secondary standard which is calibrated periodically against an Eppley Precision Spectral Pyranometer in natural daylight.

The Solar Radiation Sensor is included with the Vantage Pro2 Plus and is optional on the Vantage Pro2.

Please refer to the WeatherLink® for Vantage Pro® and Vantage Pro2™ specification sheet for optional data logging and charting capabilities available for this product.


## General

|  |   |
|--|---|
| Operating Temperature . . . . .                      | -40° to +150° F (-40° to +65° C)                                    |
| Storage Temperature . . . . .                        | -50° to +158°F (-45° to +70°C)                                      |
| Transducer . . . . .                                 | Silicon photodiode  |
| Spectral Response (10% points) . . . . .             | 400 to 1100 nanometers  |
| Cosine Response                                      |   |
| Percent of Reading . . . . .                         | ±3% (0° to ±70° incident angle); ±10% (±70° to ±85° incident angle) |
| Percent of Full Scale . . . . .                      | ±2% (0° to ±90°)  |
| Supplied Cable Length . . . . .                      | 2' (0.6 m)  |
| Cable Type . . . . .                                 | 4-conductor, 26 AWG   |
| Connector . . . . .                                  | Modular RJ-11   |
| I/O Specifications                                   |   |
| Green wire . . . . .                                 | Output (0 to +3VDC); 1.67 mV per W/m2                               |
| Red & Black wires . . . . .                          | Ground  |
| Yellow wire . . . . .                                | +3 VDC ±10%; 1mA (typical)  |
| Temperature Coefficient . . . . .                    | +0.067% per °F (+ 0.12% per °C)                                     |
| Reference temperature . . . . .                      | 77°F (25°C)   |
| Correction per degree above reference temp . . . . . | -0.067% of reading per °F (-0.12% per °C)                           |
| Correction per degree below reference temp . . . . . | +0.067% of reading per °F (+0.12% per °C)                           |
| Housing Material . . . . .                           | UV-resistant PVC plastic  |
| Dimensions (Length x Width x Height) . . . . .       | 2.00" x 2.75" x 2.25" (51 mm x 70 mm x 57 mm)                       |
| Weight . . . . .                                     | 0.5 lbs. (226 g)  |


## Sensor Output

|                                |   |
|--------------------------------|---|
| Resolution and Units . . . . . | 1 W/m <sup>2</sup>  |
| Range . . . . .                | 0 to 1800 W/m <sup>2</sup>  |
| Accuracy . . . . .             | ±5% of full scale (Reference: Eppley PSP at 1000 W/m <sup>2</sup> ) plus<br>45 W/m <sup>2</sup> per 100' (30 m) of additional cable |
| Drift . . . . .                | up to ±2% per year  |
| Update Interval . . . . .      | 50 seconds to 1 minute (5 minutes when dark)  |

## Cosine Response (typical)

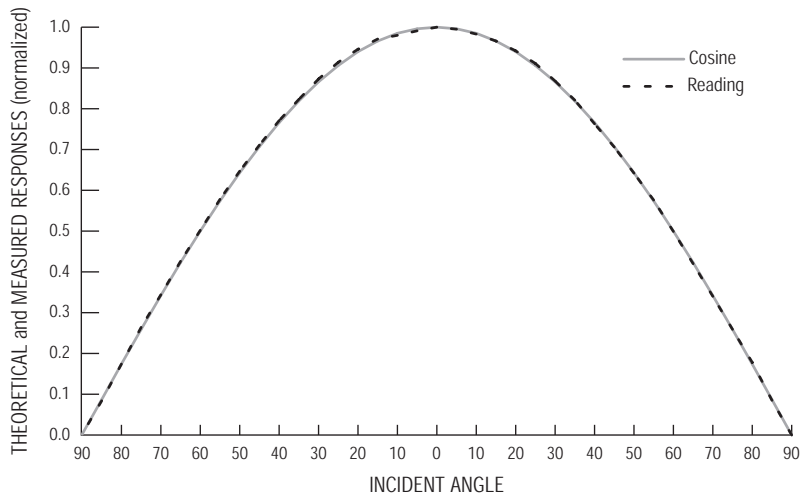

## Connections

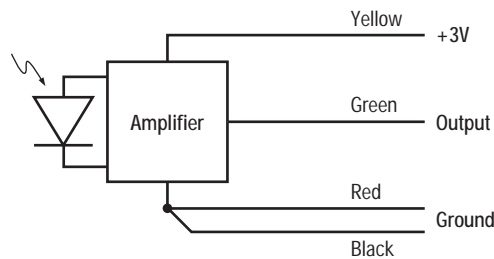

## Package Dimensions

| Product # | Package Dimensions<br>(Length x Width x Height)    | Package Weight | UPC Codes      |
|-----------|--|----------------|----------------|
| 6450      | 6.00" x 4.25" x 3.25"<br>(152 mm x 108 mm x 83 mm) | .9 lbs (.5 kg) | 011698 00240 5 |